

Standard Features:

- Designed for supply or return
- 14 gauge steel construction
- 1" flanged face plate stitch welded to sleeve
- Blades at 0° deflection: 1/8" x 1/2" blades on 1/2" centers
- Vertical support bars on 6" centers
- Blades and supports individually welded to sleeve
- #2 mesh woven wire screen: 10 gauge .135" dia. steel wire on 1/2" centers
- Standard 12" sleeve
- Soft white

Options:

- All aluminum construction (1401-A)
- All stainless steel mill finish (1401-SS)
- Countersunk mounting holes with color matching Tamper Proof Screws
- Without #2 mesh woven wire screen

Face Plate Material:

12 ga. steel 3/16" steel

Sleeve Material:

12 ga. steel 3/16" steel



Sleeve Length:

Other (minimum sleeve length 2 1/2"): _____

Blade Deflection

15° 40

Blade Deflection Options:

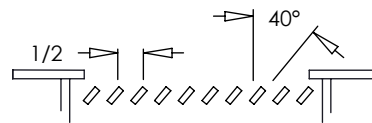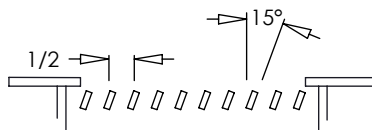

Product Notes:

*Sleeve lengths are typically sized at least 2" longer than wall thickness.
 Additional Security Grille options available.

Additional Information:

Submittal Notes

Project / Location:	
Engineer:	
Architect:	
Contractor:	