


Commercial Submittal

Round Ceiling Diffuser

MODEL: RD




Standard Features:


- Uniform 360 degree discharge pattern
- 2 position adjustment for heating and cooling seasons
- To adjust diffuser, remove the two center cones as a unit and reposition the six screws
- Retainer cables are provided on sizes 12" and larger to allow the inner cones to hang securely while adjusting the diffuser
- Available in even sizes 6" to 20" and 24"
- Glossy White

Options:

Opposed Blade Radial Damper (RD-OBR)



| | RD Dime | nsions Listed | Listed in Inches | | |
|------|---------|---------------|------------------|-----------|--|
| SIZE | А | В | C (POS.1) | C (POS.2) | |
| 6" | 6 1/2" | 11 1/8" | 1 3/4" | 1 1/8" | |
| 8" | 8 1/2" | 14 3/4" | 2 1/8" | 1 1/2" | |
| 10" | 10 1/2" | 18 1/4" | 2 7/8" | 2 1/8" | |
| 12" | 12 1/2" | 22" | 3 1/8" | 2 3/8" | |
| 14" | 14 1/2" | 26" | 3 1/8" | 2 5/8" | |
| 16" | 16 1/2" | 29" | 4" | 3 1/4" | |
| 18" | 18 1/2" | 32 1/2" | 4 3/4" | 3 7/8" | |
| 20" | 20 1/2" | 36" | 5 7/8" | 4 7/8" | |
| 24" | 24 1/2" | 43 1/4" | 7 3/4" | 6 5/8" | |

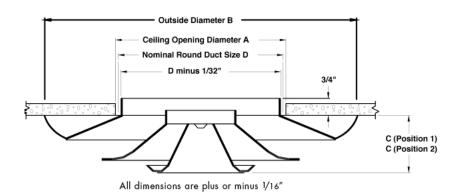

Additional Information:

Submittal Notes

| Project / Location: |
|---------------------|
| ingineer: |
| vrchitect: |
| Contractor: |