

**Standard Features:**

- Designed for supply or return
- 14 gauge steel construction
- 1" flanged face plate stitch welded to sleeve
- 3/4" square holes with 1/4" frets
- Standard 12" sleeve
- White

**Options:**

- All aluminum construction (1405-A)
- All stainless steel mill finish (1405-SS)
- Countersunk mounting holes with color matching Tamper Proof Screws

**Hole Pattern**

13/16" square holes with 3/16" frets      1/2" square holes with 3/16" frets

**Face Plate Material:**

12 ga. steel      10 ga. steel


**Sleeve Material:**

12 ga. steel      10 ga. steel

**Sleeve Length:**

No Sleeve      Other (minimum sleeve length 2 1/2"): \_\_\_\_\_

**Hole Pattern Options:**

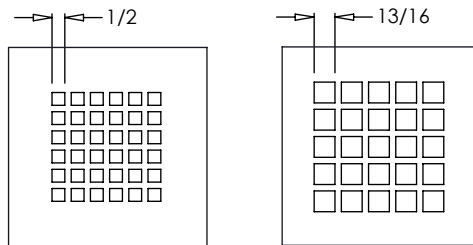

**Product Notes:**

\*Sleeve lengths are typically sized at least 2" longer than wall thickness.  
 Additional Security Grille options available.

**Additional Information:**

**Submittal Notes**

Project / Location:	
Engineer:	
Architect:	
Contractor:	