

**Standard Features:**

- Designed for supply application
- Fixed 1, 2, 3 or 4 way square steel ceiling diffuser
- 12 gauge steel security face plate of 13/16" square holes with 3/16" fret
- Available in 6"x6" through 24"x24" square neck sizes (neck sizes available in 3" increments only)
- Countersunk screw holes for with color matching Tamper Proof Screws
- White

**Options:**

- Face operated Opposed Blade Damper (1408-0)
- Return only, no core (1408-R)
- All aluminum construction (1408-A)
- All stainless steel mill finish (1408-SS)
- Square to round transition collar
- 12 gauge sleeve with continuously welded or formed seams, stitch welded to diffuser neck. Specify sleeve length (minimum sleeve length 4"): \_\_\_\_\_

**Face Plate Material:**

14 ga. steel          10 ga. steel


**Square Hole Size:**

- 1/2" x 1/2" square holes with 3/16" frets
- 3/4" x 3/4" square holes with 1/4" frets

**Air Patterns:**

- 1408-1S – One Way
- 1408-2S – Two Way
- 1408-2SC – Two Way Corner
- 1408-3S – Three Way
- 1408-4S – Four way
- 1408-R – Return No Core

**Air Patterns:**

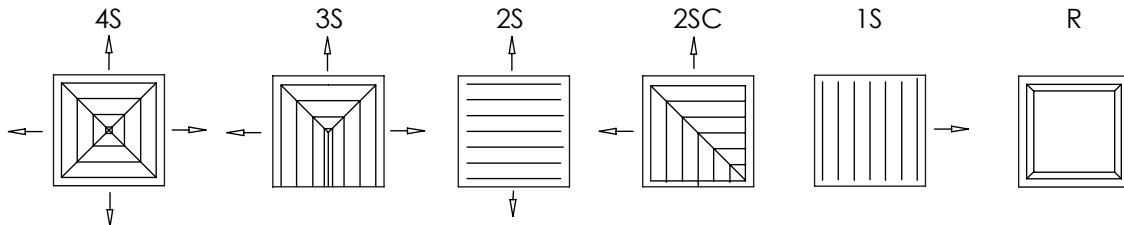

**Product Notes:**

\*Sleeve lengths are typically sized at least 2" longer than wall thickness.  
 Ceiling opening size must be larger than duct size by 2".  
 Additional Security Grille options available.

**Additional Information:**

**Submittal Notes**

Project / Location:	
Engineer:	
Architect:	
Contractor:	