



# Fire Rated Submittal

Standard Frame 1 1/2 Hour Curtain-Type Fire Damper Spring Actuated

MODEL: 2601, 2602 Series

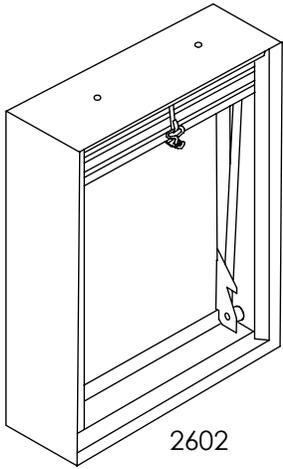


2602



### Standard Features:

- Square or rectangular spring actuated curtain-type fire damper for
- horizontal or vertical mount
- 4 1/4" standard roll formed frame
- Designed for use in wall, floors, and partitions with fire resistance ratings of 1 1/2 hours or less (for ceiling application, see 2700 Series)
- UL listed and tested in accordance with UL Standard 555
- 1 1/2 hour fire resistance rating
- Building materials rated 2 Hours or less
- CSFM California State Fire Marshal listed
- Interlocking steel roll-formed blade
- Blade lock to secure blades once product is activated
- Damper manufactured from corrosion tested galvanized mild steel (G-90)
- 165° replaceable fusible link (#50)
- Maximum dimensions 60"x60"

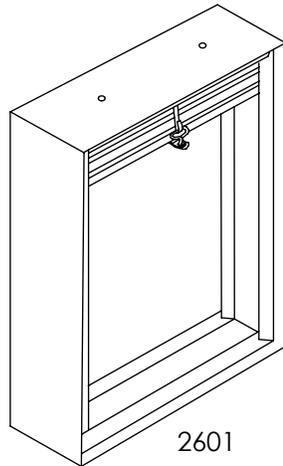

2601


### Options:

- Vertical mount only without spring actuator and blade lock, maximum dimensions single section 60"x60" or multiple sections 120"x120" (2601)
- Stainless steel
- Sleeves
- Fractional, exact O.D. dimensions
- 212° fusible link (#52)
- ETL link (#56)


### Finishes:

STANDARD COLORS

- Galvanized

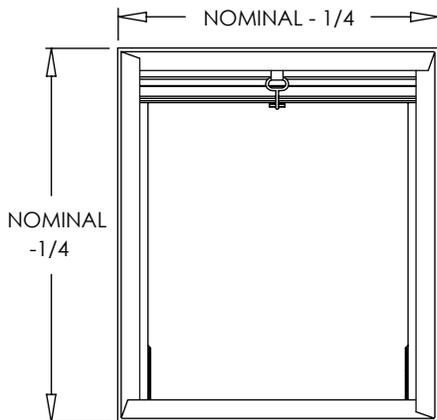

2601 & 2602

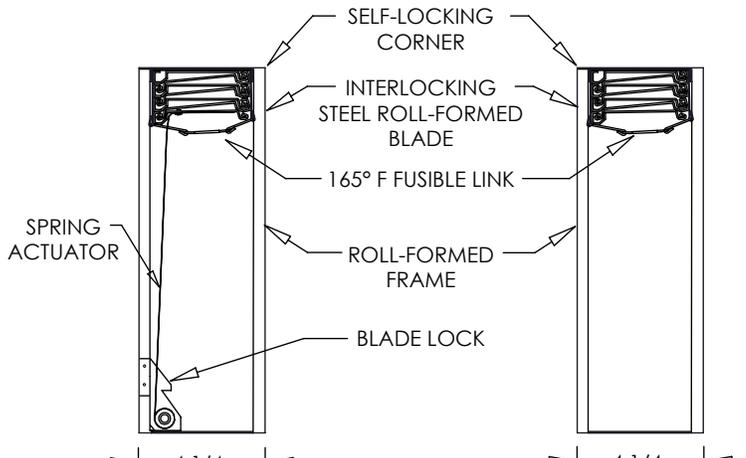

2602

2601

### Additional Information:

### Submittal Notes

Project / Location:	
Engineer:	
Architect:	
Contractor:	