

3000P-AF/3000OBD-AF	Leakage Class		
DAMPER WIDTH	1in. wg	4in. wg	6in. wg
48"	1A	1	1


Torque: 9.0 in.lb/sq.ft applied to close and seat the damper.



Shoemaker certifies that the 3000P-AF and 3000OBD-AF herein are licensed to bear the AMCA Seal. The ratings shown are based on the tests and procedures performed in accordance with AMCA publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA International Certified Rating Seal applies to Air Performance and Air Leakage.

### AMCA Certified Pressure Drop Data

#### AMCA 5.3

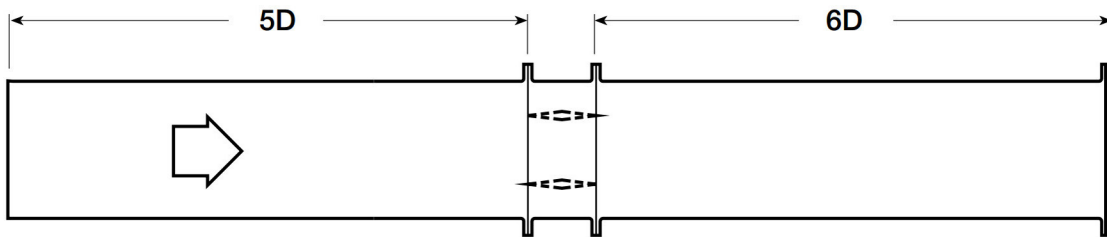

12"x12"	
VELOCITY (FPM)	PRESSURE DROP (IN.WG)
500	0.025
1000	0.120
1500	0.210
2000	0.480

24"x24"	
VELOCITY (FPM)	PRESSURE DROP (IN.WG)
500	0.003
1000	0.019
1500	0.045
2000	0.090

36"x36"	
VELOCITY (FPM)	PRESSURE DROP (IN.WG)
500	0.002
1000	0.012
1500	0.025
2000	0.050

12"x48"	
VELOCITY (FPM)	PRESSURE DROP (IN.WG)
500	0.005
1000	0.022
1500	0.040
2000	0.085

48"x12"	
VELOCITY (FPM)	PRESSURE DROP (IN.WG)
500	0.01
1000	0.05
1500	0.10
2000	0.12

AMCA Certified Leakage Data

